


DYNATON TILT PROPS

Data Sheet



ALL IN ONE PLACE

Get everything you need with Dynaton, from engineering and consumables, to on-site delivery and pick-up of goods

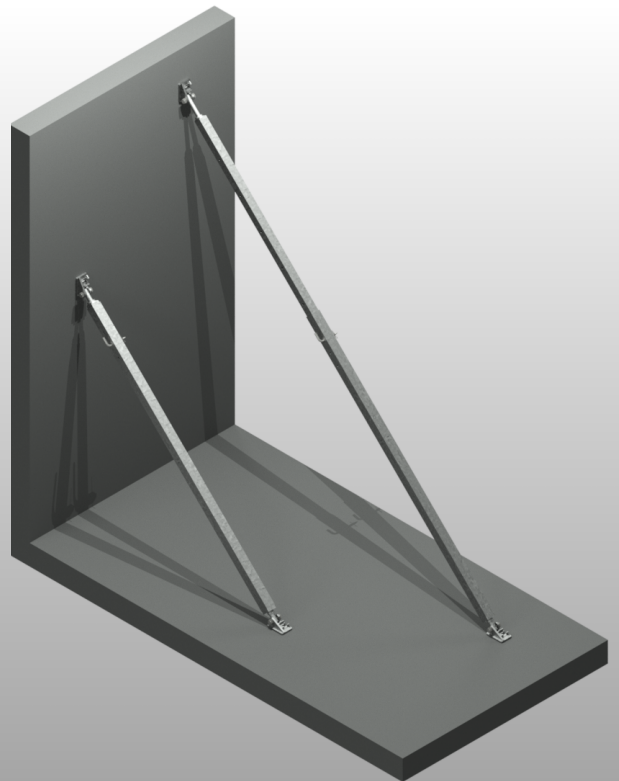


For the last fifteen years up to today, Dynaton continues to be a leader manufacturer and supplier of tilt props for the Australian and New Zealand markets.

Tilt Props are mainly used for supporting concrete precast wall structures.

The Mini Tilt Prop length can be adjusted from 2.6m to 4.2m. The Standard Tilt Prop length ranges from 4.1m to 6.8m.

All our props are made of hot dipped galvanised steel and designed to comply with the Australian and New Zealand Standards.

Available to hire or purchase.

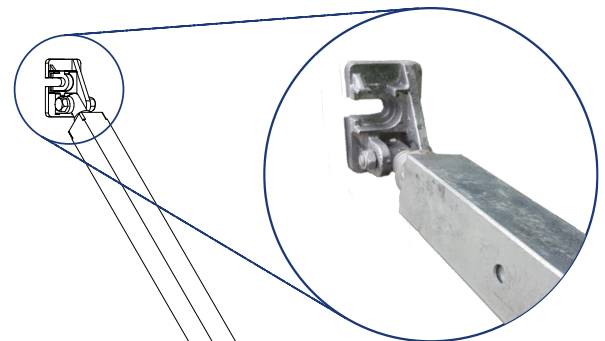

DYNATON		STANDARD 3 TILT PROP				
WORKING LOAD LIMIT (kN)		NOMINAL LENGTH				
		4.1m	4.8m	5.5m	6.1m	6.8m
COMPRESSION		76.8	50.4	36.3	25.2	19.6
TENSION		41.8				

DYNATON		MINI TILT PROP			
WORKING LOAD LIMIT (kN)		NOMINAL LENGTH			
		2.7m	3.1m	3.4m	4.2m
COMPRESSION		47.0	47.0	45.0	25.0
TENSION		49.0			

NEW ZEALAND
Unit 19/46 Ellice Road
Wairau Valley, 0629
+64 9 440 9696
sales@dynaton.co.nz

AUSTRALIA (Brisbane)
213 Sandy Creek Road
Yatala, QLD, 4207
+61 7 3287 4633
sales@dynaton.com.au

AUSTRALIA (Sydney)
Unit 3, 15 Bosci Road
Ingleburn, NSW, 2565
+61 2 8711 3470
sales@dynaton.com.au

Choose Dynaton for quality
formwork and scaffold products
Visit us at www.dynaton.co.nz